




HSF



ROHS

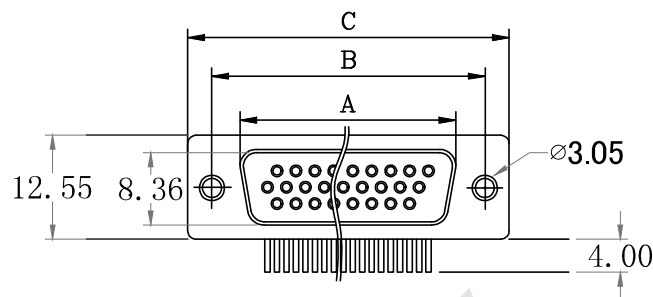

MATING FACE

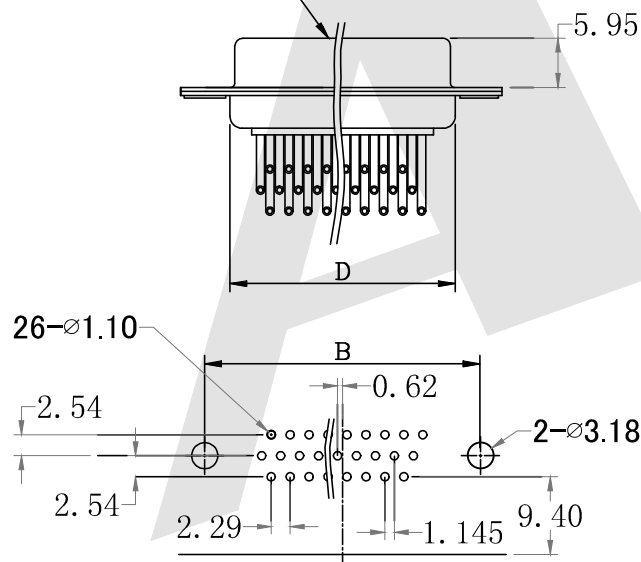

P.C.B LAYOUT

No.of Contact	A ±0.25 ±0.01	B ±0.13 ±0.005	C ±0.38 ±0.015	D ±0.25 ±0.01
15	16.33 0.643	24.99 0.984	30.81 1.213	19.28 0.759
26	24.66 0.971	33.32 1.312	39.14 1.541	27.51 1.083
44	38.38 1.511	47.04 1.852	53.04 2.088	41.28 1.625
62	54.84 2.159	63.50 2.500	69.32 2.729	57.71 2.272

MATERIALS AND FINISH

SHELL:STEEL MATERIAL,FRONT SHELL NICKEL FINISHED
BACK SHELL NICKEL FINISHED

INSULATOR:PBT THERMOPLASTIC, 30% GLASS
FILLED, UL 94V-0 RATED, WHITE COLOR

CONTACT MATERIAL:BRASS
CONTACT FINISH:FULL 2u" GOLD

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 5.0 AMPS
CONTACT RESISTANCE : 30 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN
INSULATION RESISTANCE : 5000 MEGAOHMS MIN
TEMPERATURE RATING : -55℃~+105℃

Ordering Code:

MHDR02 - F - X - X - X - X
① ② ③ ④ ⑤ ⑥

- ① MHDR Series
② Contact Type:
F:Female
③ Contact NO.:

15=15pin 26=26pin
44=44pin 62=62Pin

④ Mounting Option:

A: No accessories

B:BRACKET WITH #4-40 INSERT,

BOARD LOCK AND LOCATOR PLATE

⑤ Insulation Color Code:

B:Black G:Grey

W:White L:Blue

⑥ Contact Plating

S: Selective Gold

S1:Selective 3u" Gold

S2:Selective 5u" Gold

S3:Selective 10u" Gold

S4:Selective 15u" Gold

S5:Selective 30u" Gold

G0: Gold flash

G1: 3u" Gold over

G2: 5u" Gold over

G3: 10u" Gold over

G4: 15u" Gold over

G5: 30u" Gold over

Unless Otherwise specified tolerance

X. ±0.35 X.XX: ±0.20

X.X: ±0.25 X.XXX: ±0.15

SCALE:

As Shown

UNIT:

mm

DRAW

Lv Xun Hua

DATE

04/03/2019

CHECK

BobYang

DATE

04/03/2019



ANTENK ELECTRONICS CO.,LTD

Http://www.antenk.com

E-mail:sales@antenk.com

TITLE:

D-SUB High density R/A FEMALE MACHINE
PIN 9.4mm FOOTPRINT

DRAWING NO:

MHDR02-FXXXX

PRODUCT NO:

MHDR02-FXXXX

REV

DESCRIPTION

DATE